COMFORT SUITES

3366 Busbee Drive NW,
Kennesaw , Georgia, 30144

DRAWING LIST

ARCHITECTURAL

A001 COVER SHEET
A101 1st FLOOR & RCP PLAN
A102 2nd FLOOR & RCP PLAN
A103 3rd FLOOR & RCP PLAN
A104 4th FLOOR & RCP PLAN
A105 ROOF PLAN
A201 NORTH ELEVATION
A202 WEST ELEVATION
A203 SOUTH ELEVATION
A204 EAST ELEVATION
A301 BUILDING SECTIONS
A302 STAIR DETAILS
A401 WALL SECTIONS
A402 WALL SECTIONS
A403 WALL SECTIONS
A404 SITE DETAILS
A405 CANOPY DETAILS
A406 RATED ASSEMBLIES AND WALL TYPES
A501 DETAIL FLOOR LAYOUT OF 1st FLOOR PUBLIC AREAS
A502 DETAIL FLOOR LAYOUT OF 2nd FLOOR PUBLIC AREAS
A503 DETAIL REFLECTED CEILING LAYOUT OF 1st FLOOR PUBLIC AREAS
A503a DETAIL REFLECTED CEILING LAYOUT OF 2nd FLOOR PUBLIC AREAS
A504 DETAIL : INTERIOR POOL
A505 PUBLIC SPACE -INTERIOR ELEVATION
A506 PUBLIC SPACE -INTERIOR ELEVATION
A507 DETAIL: TYPICAL KING GUESTROOM
A508 DETAIL WIDE BAY KING GUESTROOM
A509 DETAIL:ACCESSIBLE KING GUESTROOM
A510 DETAIL:DOUBLE/DOUBLE GUESTROOM
A511 DETAIL:ACCESSIBLE DOUBLE/DOUBLE GUESTROOM
A312 STAIR DETAILS
A501 ELEVATIONS : DOORS & WINDOWS
A502 SCHEDULES: FINISHES & DOORS
A701 MILLWORK ELEVATIONS AND SECTIONS
A702 MILLWORK ELEVATIONS AND SECTIONS
A703 MILLWORK ELEVATIONS AND SECTIONS

STRUCTURAL
S1 General Notes, Schedules & Details
S2 First Floor Foundation Plan
S3 Second Floor Framing Plan
S4 Third Floor Framing Plan
S5 Fourth Floor Framing Plan
S6 Roof Framing Plan
S7 Elevations and Details
S8 Sections & Details
S9 Sections & Details
S10 Structural Specifications

ELECTRICAL
E101 SITE PLAN - ELECTRICAL
E102 1st FLOOR PLAN - POWER
E103 1st FLOOR PLAN - POWER - MECHANICAL EQUIPMENT
E104 1st FLOOR PLAN - LIGHTING & FIRE ALARM SYSTEM
E105 2nd FLOOR PLAN - POWER
E106 2nd FLOOR PLAN - POWER MECHANICAL EQUIPMENT
E107 2nd FLOOR PLAN - LIGHTING & FIRE ALARM SYSTEM
E108 3rd FLOOR PLAN - POWER
E109 3rd FLOOR PLAN - LIGHTING & FIRE ALARM SYSTEM
E110 4th FLOOR PLAN - POWER
E111 4th FLOOR PLAN - LIGHTING & FIRE ALARM SYSTEM
E112 TYPICAL ROOM ELECTRICAL LAYOUT
E113 ONE LINE DIAGRAM
E114 PANEL SCHEDULES
E115 PANEL SCHEDULES
E116 SPECIFICATION
E117 SPECIFICATION
E118 SYMBOLS
E119 LIGHTING FIXTURE SCHEDULE

MECHANICAL
M101 1st FLOOR PLAN -MECHANICAL
M102 2nd FLOOR PLAN -MECHANICAL
M103 3rd FLOOR PLAN -MECHANICAL
M104 4th FLOOR PLAN -MECHANICAL
M301 SCHEDULES & NOTES -HVAC
M302 SCHEDULES & NOTES -HVAC
M303 DETAILS -HVAC

PLUMBING
P101 1st FLOOR PLAN -PLUMBING
P102 2nd FLOOR PLAN -PLUMBING
P103 3rd FLOOR PLAN - PLUMBING
P105 4th FLOOR PLAN - PLUMBING
P201 BATHROOM TYPES PLUMBING
P301 DETAILS NOTES AND SCHEDULES -PLUMBING
P302 NOTES & DETAILS PLUMBING
P303 DETAILS -PLUMBING
P401 SANITARY RISERS - PLUMBING
P402 SANITARY RISERS -PLUMBING
P403 WATER RISERS - PLUMBING
P404 WATER RISERS - PLUMBING

CODE COMPLIANCE

International Building Code (2006 Edition)

OCCUPANCY:
- Residential (R-1)
- Non-Separated Mixed Use (R-1 = Primary Occupancy)

TYPE OF CONSTRUCTION:
- Type 2B
- Provide for Supervised Automatic Sprinkler System

BUILDING HEIGHT:
- Allowed (4 Stories and 65' Total in Height)
- Height Modification (Reference 504.2 = 20' and 1 Story)
- Required (4 Stories and 56'-0" in Height)

BUILDING AREA:
- Allowed (7,000 Square Feet Per Floor or 21,000 SF Total)
- Area Modification (Reference 506.3 = 200% Increase)
  - Adjusted Allowance (21,000 SF Per Floor or 63,000 SF Total)
- Required (10,571 Gross Square Feet or42,369 GSF Total)

FIRE RESISTANCE:
- Corridors (Fire-Resistance Rating of 1 hour)
- Stairs (Fire-resistance Rating of 2 hour)
- Guestroom Separation (Fire-Resistance Rating of 1 hour)

INCIDENTAL USE AREA:
- Laundry Area (+100 SF = 1 hour Separation)
- Storage Area (+100 SF = 1 hour Separation)
- Linen Collection Rooms (1 hour Separation)

EGRESS COMPONENTS:
- Stairs at 0.2" per Load or min. of 44"
- Other at 0.15 per Load or min. of 32"

MEANS OF EGRESS:

Component	Requirements	Provided
- # of Exits	- 2 per floor (minimum)	- 2 per floor
- Travel Distance	- 250' max. (w/ SPS)	- 150' max.
- Dead End Corridor	- 20' max.	- 16'
- Corridor Width	- 44" min	- 60"

STRUCTURAL ELEMENT	FIRE RATING
- Structural Frame	- No Rating
- Bearing Walls (Int. & Ext.)	- No Rating
- Floor Construction	- No Rating
- Roof Construction	- No Rating

FIRE BARRIER	FIRE RATING
- Stair Walls	- 2 hr
- Elevator walls	-2 hr
- laundry chute	- 2 hr

FIRE PARTITION	FIRE RATING
- Corridor	- 1 hr
- Guestroom Separation	- 1 hr

CIVIL
(CONTACT CIVIL ENGINEER FOR DRAWINGS
LIST INCLUDED FOR INFORMATION ONLY.)
CS COVER SHEET
A1 ALTA SURVEY
S1 SITE PLAN
G1 GRADING PLANS
WA WATER PLAN
EP ENTRANCE PLAN & SIGHT DISTANCE PROFILE
B1 BUFFER AVERAGE PLAN
CN EROSION & SEDIMENT CONTROL NOTES
E1-3 EROSION & SEDIMENT CONTROL PLANS
ED1-ED6 EROSION CONTROL DETAILS
CMP COMPREHENSIVE MONITORING PLAN
TPP TREE PROTECTION PLAN
TRP1-TRP3 TREE REPLACEMENT PLAN
SS1 SANITARY SEWER AND WATER PROFILES
ST1-ST2 STORM SEWER PROFILES AND CHART
D1-D2 SITE DETAILS
D3 STORM SEWER DETAILS
D4 COBB COUNTY SEWER DETAILS
D5 COBB COUNTY WATER DETAILS
D6 COBB COUNTY POND WALL DETAILS
WP POND WALL PROFILE
OC1-OC2 OUTLET CONTROL STRUCTURE DETAILS

PROJECT TEAM

Owner:
Kasandas Properties Inc.
637 Cobb Parkway South,
Marietta, Ga., 30060
Tel: 678 592 0143
email: rpatel@kasandas.com

Architect:
Architectural Design Workshop, P.C.
814 Covered Bridge Way,
Fairborn, Ga. 30213
Tel 770 306 7464
email : designworkshop@comcast.net

Civil Engineer
Planners and Engineers Collabrative ,
350 Research Court, Norcross, Ga. 30092.
Tel: 770 451 2341
email: jnorris@pecatl.com

Structural Engineer:
Layne Structural
3745 Cherokee St NW #206
Kennesaw, Ga. 30144
Tel (678) 581-0070
email:whl2@mindspring.com

Electrical Engineer:
Eng Group Inc.,
2952 Twilight view,
Snellville, Ga. 30078
Tel (770)573-3537
email: mitchm@eng-group.com

Mechanical Engineer:
Griffith Engineering
4360 Chamblee Dunwoody Road,
Suite 210
Atlanta, Ga. 30341
Tel: (770)451 6757
email: mcgriffith@griffitheng.com

SYMBOLS

1'-0"	DIMENSION TO FACE
(flag)	KEYED FLAG NOTE
(square)	EQUIPMENT / TOILET AND BATH ACCESSORIES
(hexagon)	STOREFRONT AND WINDOW TYPES
(accessible symbol)	ACCESSIBLE ROOM SYMBOL
(hearing symbol)	HEARING IMPAIRED ROOM SYMBOL
S.O.G	SLAB ON GRADE
SN.	SEALAR
CONC.	CONCRETE
VCT	VINYL COMPOSITE TILE
P.T.	PAINT
GWB	GYPSUM WALL BOARD
VWC	VINYL WALL COVERING
CT	CERAMIC TILE
CP&PD	CARPET AND PAD
FEC	FIRE EXTINGUISHER CABINET
FEC-HV	FIRE EXTINGUISHER CABINET AND HOSE VALVE
GYP.	GYPSUM
EIFS	EXTERIOR INSULATION AND FINISH SYSTEM
1 HR.	ONE HOUR
DWGS.	DRAWINGS
EXT.	EXTERIOR

GENERAL NOTES

GENERAL NOTES
THESE DRAWINGS INDICATE THE GENERAL SCOPE OF THE PROJECT IN TERMS OF THE ARCHITECTURAL DESIGN CONCEPT, THE DIMENSIONS OF THE BUILDING, THE MAJOR ARCHITECTURAL ELEMENTS AND THE TYPE OF STRUCTURAL, MECHANICAL AND ELECTRICAL SYSTEMS. THE DRAWINGS DO NOT NECESSARILY INDICATE OR DESCRIBE ALL WORK REQUIRED FOR FULL PERFORMANCE AND COMPLETION OF THE REQUIREMENTS OF THE CONTRACT DOCUMENTS. ON THE BASIS OF THE GENERAL SCOPE INDICATED OR DESCRIBED, THE CONTRACTOR SHALL FURNISH AND COORDINATE ALL ITEMS REQUIRED FOR THE PROPER EXECUTION AND COMPLETION OF THE WORK. QUESTIONS PERTAINING TO THE DRAWINGS OR THEIR INTENT SHOULD BE DIRECTED TO THE ARCHITECT. ANY DISCREPANCIES OR QUESTIONS OF INTENT SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT OR OWNER IMMEDIATELY. ARCHITECT OR OWNER SHALL PROMPTLY MAKE A DECISION OF ANY ISSUE IN WRITING. ANY WORK BY CONTRACTOR WITHOUT SUCH WRITTEN DETERMINATION SHALL BE AT THE CONTRACTOR'S RISK AND EXPENSE.

THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL REQUIRED PERMITS, INSPECTIONS AND APPROVALS. AT THE COMPLETION OF THE CONTRACT HE/SHE SHALL SUPPLY THE OWNER WITH A DULY ISSUED CERTIFICATE OF OCCUPANCY, LIEN WAIVERS FROM ALL SUBCONTRACTORS, OPERATION AND MAINTENANCE MANUALS FOR ALL EQUIPMENT, AS BUILT DRAWINGS OF ALL WORK THAT DEVIATES FROM THESE DOCUMENTS, AND ALL KEYS TO THE PROJECT.

THE GENERAL CONTRACTOR AND ALL SUBCONTRACTORS SHALL COMPLY WITH ALL REGULATIONS OF APPLICABLE FEDERAL STATE AND COUNTY LAWS INCLUDING ALL CODES AND ORDINANCES. IF REGULATIONS OF THE ABOVE SHOULD DIFFER FROM THE PLANS, THE CONTRACTOR SHALL NOTIFY THE OWNER AND THE ARCHITECT IMMEDIATELY. ALL CONTRACTORS ARE REQUIRED TO VISIT THE SITE TO ACQUAINT THEM SELVES OF CONDITIONS THAT AFFECT THE SCOPE OF THE WORK INVOLVED BEFORE SUBMITTING ANY BIDS FOR THE PROJECT.

THE ENTIRE BUILDING SHALL BE EQUIPPED WITH A FIRE SUPPRESSION SPRINKLER SYSTEM, DESIGNED AND INSTALLED BY A GEORGIA CERTIFIED FIRE SPRINKLER CONTRACTOR. THE SYSTEM SHALL BE IN ACCORDANCE WITH NFPA 13R AND ALL LOCAL CODES AND ORDINANCES. SYSTEM TO BE WET PIPE SYSTEM TO ALL PUBLIC AREAS AND GUEST ROOMS. SPRINKLER HEADS SHALL BE OF A QUICK RESPONSE TYPE. COORDINATE THE INSTALLATION WITH THE FIRE ALARM SYSTEMS AND ASSURE THAT THE ALARM ACTIVATION REQUIREMENTS ARE MET.
NOTE: FIRE DEPT. CONNECTION TO BE READILY ACCESSIBLE, EASILY VISIBLE AND PROPERLY IDENTIFIED. TAMPER SWITCH OF SPRINKLER VALVE SHALL ACTIVATE TROUBLE ALARMS IN FIRE ALARM CONTROL AND REMOTE ENUNCIATOR PANELS.

THE SPRINKLER CONTRACTOR SHALL PROVIDE A COMPLETE DESIGN FOR THE SPRINKLER SYSTEMS, AND SHALL SUBMIT SAME FOR APPROVAL TO LOCAL FIRE AUTHORITIES AND OBTAIN ALL REQUIRED PERMITS AND APPROVALS

SPRINKLERS; SPRINKLERS NFPA 13R WITH DRY PIPE SYSTEM IN ATTIC

FIRE SPRINKLER SYSTEM TO BE DESIGNED BY FIRE PROTECTION SUBCONTRACTOR SUBJECT TO REVIEW AND APPROVAL OF ARCHITECT OF RECORD AND LOCAL BUILDING AUTHORITIES.

ALL SPRINKLER PIPES TO BE ENCASED IN CHASES TO LEAD TO ROOMS.

THE BUILDING SHALL BE EQUIPPED WITH A FIRE ALARM SYSTEM, DESIGNED AND INSTALLED BY A GEORGIA CERTIFIED FIRE ALARM CONTRACTOR IN ACCORDANCE WITH THE REQUIREMENTS OF NFPA 101, LIFE SAFETY CODE AND ALL APPLICABLE LOCAL CODES AND ORDINANCES. THE CONTRACTOR SHALL PROVIDE A COMPLETE DESIGN AND SUBMIT FOR AND OBTAIN ALL REQUIRED PERMITS AND APPROVALS. COORDINATE THE INSTALLATION WITH THE FIRE SPRINKLER SYSTEM, ELEVATOR SYSTEM AND ASSURE ALL ALARM ACTIVATION REQUIREMENTS ARE MET.
PRIOR TO FIRE DEPT. INSPECTION, ALARM SYSTEM SHALL BE TESTED AND ADJUSTED TO ASSURE THAT ALARMS CAN BE HEARD IN ALL GUEST ROOMS WITH DOORS CLOSED AND A/C UNITS OPERATING.
FIRE ALARM CONTRACTOR SHALL COORDINATE WITH THE OWNER TO ESTABLISH MONITORING OF THE SYSTEM BY AN APPROVED PRIVATE COMPANY OR FIRE DEPT. SECURITY SYSTEM TO BE DESIGNED AND INSTALLED BY SPECIALIST TO THE OWNER'S APPROVAL.

SEE SITE PLANS (BY CIVIL ENGINEER) FOR GRADING, PAVING, UTILITIES INSTALLATION AND OTHER RELATED INFORMATION REGARDING SITE IMPROVEMENT'S FOR THIS PROJECT. CONTRACTOR SHALL COORDINATE THE DRAWING FOR ALL DISCIPLINES.
UNLESS NOTED SPECIFICALLY "FOR CONSTRUCTION" THESE DRAWINGS SHALL NOT BE USED FOR CONSTRUCTION SCOPE OF THE WORK

CONTRACTOR SHALL PROVIDE ALL LABOR, EQUIPMENT AND MATERIALS FOR A FINISHED AND COMPLETE TURNKEY JOB, INCLUDING ALL PERMITS AND POSTINGS, ANY DEMOLITION OR HAUL OFF, ALL UTILITY CONNECTIONS. COMPLETED BUILDING WITH INDICATED FINISHES AND FURNISHINGS, SWIMMING POOL, ALL SITE IMPROVEMENTS, COMPLETE POST CONSTRUCTION CLEANUP AND ALL CLOSING DOCUMENTS, LIEN WAIVERS, WARRANTIES ETC.,

TREAT GROUND UNDER SLAB AND FOOTINGS WITH TERMITE POISONING BY QUALIFIED CONTRACTOR. CONTRACTOR TO PROVIDE CERTIFICATE TO OWNER.

PLAN FOR FIRE PROTECTION SPRINKLER PIPING INCLUDING COMPLETE SEISMIC SUPPORT DETAILS SHALL BE REVIEWED AND APPROVED BY THE COUNTY FIRE MARSHAL'S OFFICE PRIOR TO INSTALLATION FOR COMPLIANCE WITH SBC SECTION 1621.3.10.1 AND NFPA 13.

CONTRACTOR SHALL PROVIDE DETAILS THAT CLEARLY INDICATE REQUIRED INSTALLATION OF SUSPENDED CEILINGS TO ADEQUATELY ACCOMMODATE THE APPLICABLE SEISMIC DESIGN FORCES FOR ALL CEILINGS EXCEPT THOSE WHICH ARE NOT REQUIRED TO REMAIN FUNCTIONAL AFTER AN EARTHQUAKE INCLUDING NON-FIRE RATED CEILINGS IN BUILDINGS UP TO TWO STORIES IN HEIGHT CLASSIFIED AS SEISMIC DESIGN CATEGORY C AND SEISMIC USE GROUP / (SBC TABLE 1604.5). [NOTE; PROPOSED DETAILS SHALL COMPLY WITH THE REQUIREMENTS OF CISCA (CEILING AND INTERIOR SYSTEM CONSTRUCTION ASSOCIATION) EXCEPT AS INDICATED IN SBC SECTION 1621.2.5.2] (SBC SECTION 1621.2.5)

SPECIALIST TO PROVIDE COMPLETE DESIGN AND SPECIFICATIONS FOR THE INDOOR POOL AND SPA AND SUBMIT SHOP DRAWINGS FOR ALL POOL EQUIPMENT INCLUDING AUX. H.W. HEATERS TO OWNER, ARCHITECT AND COUNTY FOR APPROVALS. CONTRACTOR IS TO PROVIDE AND CO-ORDINATE WATER ELECTRICAL AND SANITARY SERVICES FOR THE PROPER INSTALLATION OF THE POOL AND THE SPA

SIGNS, LOCATION, NUMBER AND SIZE ARE NOT APPROVED UNDER THIS BUILDING PERMIT, A SEPARATE SIGN LOCATION PERMIT IS REQUIRED FOR EACH SIGN. CONTACT DEVELOPMENT REVIEW AT (770) 822-7500 FOR ADDITIONAL INFORMATION.INDOOR SIGNAGE TO BE IN COMPLIANCE WITH ADA(1990) AND TITLE 30, GEORGIA ACCESSIBILITY CODE(120-3-20)

CONTRACTOR SHALL PERMANENTLY IDENTIFY ALL FIRE-RESISTANCE-RATED WALLS (AND CORRESPONDING FIRE RATING) INCLUDING FIRE BARRIER WALLS, SMOKE BARRIER WALLS, FIRE PARTITIONS, FIRE WALLS, AND SHAFT ENCLOSURES EITHER BY INSTALLING SIGNS OR BY STENCILING IN CONCEALED SPACES THE FOLLOWING: (--) HOUR FIRE AND SMOKE BARRIER - PROTECT ALL OPENINGS. IDENTIFICATION SHALL BE SPACED NO MORE THAN TWELVE FEET ON CENTER WITH A MINIMUM LETTER SIZE OF TWO INCHES IN HEIGHT ON A CONTRASTING BACKGROUND. (SBC SECTION 703.5 OF THE 2002 GA STATE AMENDMENTS.

INSULATING MATERIALS INSTALLED IN BUILDINGS OF ANY TYPE OF CONSTRUCTION SHALL HAVE A FLAME SPREAD INDEX OF NOT MORE THAN 25 AND A SMOKE- DEVELOPED INDEX OF NOT MORE THAN 450 AS DETERMINED IN ACCORDANCE WITH ASTM E 84. CLEARLY SPECIFY ON DRAWINGS THE CORRESPONDING FLAME SPREAD AND SMOKE-DEVELOPED INDEXES FOR THE PROPOSED INSULATION TO DOCUMENT COMPLIANCE WITH SBC SECTIONS 718.1, 718.2 AND 718.3. [EXCEPTION: FLAME SPREAD AND SMOKE DEVELOPED INDEXES DO NOT APPLY TO FACINGS, COVERINGS, AND LAYERS OF REFLECTIVE FOIL INSULATION INSTALLED IN CONCEALED SPACES AND IN DIRECT CONTACT WITH THE UNEXPOSED SURFACE OF THE CEILING, WALL, OR FLOOR FINISH FOR BUILDINGS OF TYPES III, IV, OR V CONSTRUCTION] (SBC SECTION 718)

ALL ARCHITECTURAL, MECHANICAL, AND ELECTRICAL COMPONENTS SHALL BE INSTALLED TO RESIST THE SEISMIC DESIGN FORCES SPECIFIED PER SBC SECTION 1621 UNLESS EXEMPT AS LISTED IN SBC SECTION 1621.1.1

ALL WORK DESCRIBED IN THESE PLANS SHALL COMPLY WITH THE FOLLOWING CODES AND THEIR AMENDMENTS:

1. 2000 GEORGIA FIRE CODE WITH AMENDMENTS
3. 1997 NFPA CODES AND STANDARDS AS ADOPTED AND MODIFIED BY THE STATE FIRE MARSHAL TITLE 25 OCGA.
4. TITLE 30 OCGA, GEORGIA ACCESSIBILITY CODE.

CONTACT COUNTY FIRE MARSHAL'S OFFICE FOR INSPECTIONS AT 50%,80% AND 100% COMPLETION.

OWNER TO ALLOW A CONTINGENCY SUM OF 5% OF CONTRACT SUM FOR ANY ERRORS OR OMISSIONS IN THESE DOCUMENTS

KEY MAP

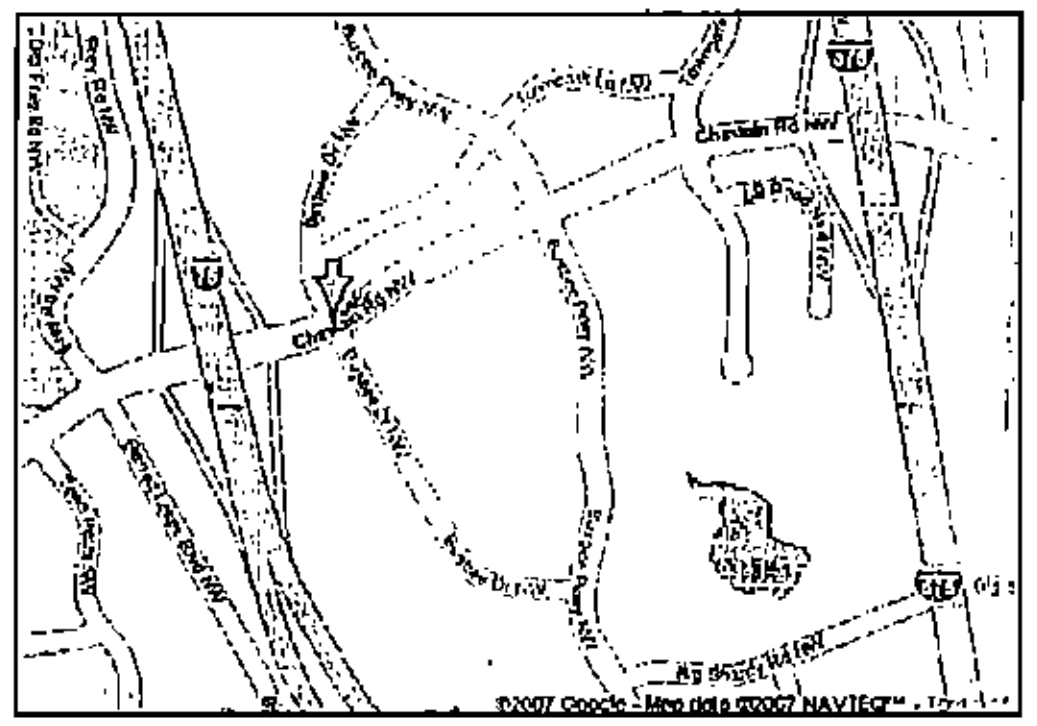

Ldp no. 060356 parcel Id 16043100040

APPLICABLE CODES

Applicable Codes:
Standard Building Code (International Building Code), 2006 Edition with Georgia amendments
Rules and Regulations of the Safety Fire Commissioner for the State Minimum Fire Safety Standards, August 21, 2003 (Georgia Safety Fire Law)
National Fire Protection Association (NFPA) 101 Life Safety Code, 2000 Edition with Georgia Amendments
Standard Gas Code (International Fuel Gas Code), 2006 Edition with Georgia Amendments
Standard Mechanical Code (International Mechanical Code), 2006 Edition with Georgia Amendments
Standard Plumbing Code (International Plumbing Code), 2006 Edition with Georgia Amendments National Electrical Code, 2006 Edition with Georgia amendments
Georgia Handicapped Accessibility Law 120-3-20
ANSI 17.1 1996 Elevator Code, with 1999 Georgia amendments
International Energy Conservation Code, 2006 Edition with Georgia Amendments
Standard Fire Prevention Code (International Fire Code), 2006 Edition with Georgia amendments

PROJECT DATA

7D GUESTROOMS (INTERIOR POOL)					
DESCRIPTION	1st	2nd	3rd	4th	Total
KING ROOMS	9	9	10	10	38
WIDE BAY KING	0	0	5	5	10
DOUBLE/DOUBLE ROOMS	5	5	6	6	22
TOTAL ROOMS	14	14	21	21	70

NOTES
1. EVERY HANDICAPPED ACCESSIBLE ROOM IS HEARING IMPAIRED
2. 4 TOTAL HANDICAPPED ACCESSIBLE ROOMS PROVIDED
3. 4 ADDITIONAL HEARING IMPAIRED ROOMS PROVIDED

FLOOR AREA SUMMARY

FIRST FLOOR	-	10,571 S.F.
SECOND FLOOR	-	10,656 S.F.
THIRD FLOOR	-	10,571 S.F.
THIRD FLOOR	-	10,571 S.F.
TOTAL AREA	=	42,369 G.S.F.

STATE OF GEORGIA
ISHVARA PATHAK
CERTIFICATE NO.
REGISTERED ARCHITECT

ARCHITECTURAL DESIGN WORKSHOP P.C.
814 COVERED BRIDGE WAY,FAIRBURN, GA. 30213. TEL 770 306 7464.
CLIENT : Kasandas Properties
PROJECT : New Comfort Suites Hotel
Chastain Road NW & Busbee Drive NW, Kennesaw, Ga. 30144

COMFORT SUITES
BY CHOICE HOTELS

COVER SHEET

Project number 7001
Date 2/20/07
Drawn by VP
Checked by ID
A001
Scale

TO ORDER PLANS GO TO WWW.LDIREPRO.COM