ABBREVIATIONS

AB	Anchor Bolt	KIT	Kitchen
ACT	Acoustical Tile	KO	Knockout
ADH	Adhesive	KD	Knockdown
ADJ	Adjustable		
AFF	Above Finish Floor	LAM	Laminated
ALT	Alternative, Alternate	LAV	Lavatory
ALUM	Aluminum	LF	Linear Feet
ANOD	Anodized	LKR	Locker
ARCH	Architect, Architectural	LT	Light
ASPH	Asphalt		
AU	Ash Urn	MAS	Masonry
		MATL	Material
BD	Board (Architectural)	MBH	Mop & Broom Holder
BG	Bumper Guard	MECH	Mechanical
BITUM	Bituminous	MIR	Mirror
BLDG	Building	M/S	Mirror with Shelf
BLKG	Blocking	MO	Masonry Opening
BM	Beam	MR	Map Rack
BRK	Brick	MTG	Mounting
BRZ	Bronze	MTL	Metal
BUR	Built-up Roofing	MUL	Mullion
BWK	Brick Work		
		N/A	Non Applicable
CAB	Cabinet	NIC	Not in Contract
CCT	Cubicle Curtain Track	NOM	Nominal
CG	Corner Guard	NRC	Noise Reduction Coefficient
C.I.P.	Cast-in-Place	NTS	Not to Scale
CJ	Control Joint		
CL	Center Line	OA	Overall (Dimension)
CLG	Ceiling	OC	On Center
CLO	Closet	OD	Outside Diameter
CLR	Clear	OPNG	Opening
CMU	Concrete Masonry Unit	OPP	Opposite
COL	Column		
CONC	Concrete	PC	Precast
CONT	Continuous	PLAS	Plaster
CORR	Corridor	P LAM	Plastic Laminate
CPT	Carpet (Architectural)	PNL	Panel
CR	Curtain Rod (Shower)	PROJ	Projection, Project
CT	Ceramic Tile (Architectural)	PTD	Paper Towel Dispenser
		PWD	Plywood
DEMO	Demolish, Demolition	PT	Paint
DET	Detail	PS	Purse Shelf
DF	Drinking Fountain		
DIA	Diameter	QT	Quarry Tile
DIM	Dimension		
DN	Down	R.O.W.	Right Of Way
DR	Door	RD	Roof Drain
DS	Downspout	REF	Refrigerator
DTL	Detail	REINF	Reinforced, Reinforcement
DW	Dumbwaiter	REQD	Required
DWG	Drawing	RH	Robe Hook
DWR	Drawer	RO	Rough Opening
EA	Each	SCHED	Schedule
EDF	Elect. Drink. Fountain	SD	Soap Dish
EJ	Expansion Joint	SDP	Soap Dispenser
EL	Elevation	SECT	Section
ELEC	Electric(al)	SF	Square Foot (Feet)
ELEV	Elevator	SGT	Structural Glazed Tile
EPX	Epoxy	SHT	Sheet
EQ	Equal	SHTH	Sheathing
EQUIP	Equipment	SIM	Similar
EW	Each Way	SND	Sanitary Napkin Disposal
EXP	Exposed	SNV	Sanitary Napkin Vendor
EXT	Exterior	SPECS	Specifications
		SS	Stainless Steel
FAC	Fire Apparatus Cabinet	STC	Sound Transmission Coefficient
FD	Floor Drain	STD	Standard
FE	Fire Extinguisher	STOR	Storage
FEC	Fire Extinguisher Cabinet	STL	Steel
FFE	Finish Floor Elevation	STRUC	Structure or Structural
FHC	Fire Hose Cabinet	SUSP	Suspended
FIN	Finish	SV	Sheet Vinyl
FLR	Flooring)		
FLUOR	Fluorescent	T	Toilet
F.O.F.	Face-of-Finish	T/CONC	Top-of-Concrete
FURR	Furring	T/S	Top of Steel/Slab
		T/W	Top of Wall
GA	Gauge	T&G	Tounge and Groove
GALV	Galvanized	TB	Towel Bar
GB	Grab Bar	TEL	Telephone
GC	General Contractor	THK	Thickness)
GWB	Gypsum Wallboard	TPD	Toilet Paper Dispenser
		TYP	Typical
HC	Handicapped		
HDW	Hardware	UC	Undercut
HDWD	Hardwood	UL	Underwriters Laboratory
HM	Hollow Metal	UR	Urinal
HOR	Horizontal	USU	Utility Shelf Unit
HR	Handrail		
HT	Height	VCT	Vinyl Composition Tile
HVAC	Heating/Ventilating/Air Cond.	VERT	Vertical
HV	Homogenous Vinyl	VEST	Vestibule
		VWC	Vinyl Wall Covering
I.D.	Inside Diameter		
IN	Inches	WD	Wood
INS	Insulation	WG	Wire Glass
INT	Interior	WT	Weight
		WR	Waste Receptacles
JAN	Janitor		
JT	Joint		

MATERIALS AND SYMBOLS

	EARTH		BLOCKING	A	COLUMN CENTER LINE
	GRAVEL		PLYWOOD	ROOM NAME 100	ROOM NAME AND NUMBER
	CONCRETE		GLASS BLOCK	100	DOOR NUMBER
	CAST STONE		BATT INSULATION	E-001	EQUIPMENT NUMBER
	CMU		RIGID INSULATION	5	PARTITION TYPE
	BRICK		FOAM INSULATION	3	REVISION
	STRUCT. CLAY TILE		ACOUSTICAL TILE	A	WINDOW TYPE
	STONE		CERAMIC TILE	2 / A5.2	EXTERIOR ELEVATION
	MARBLE		TERAZZO	1 / A5.2 — 1 / A5.2	BUILDING SECTION
	STEEL		CARPET	2 / A5.2	WALL SECTION
J I L	STRUCTURAL STEEL	N (MAGNETIC NORTH)	PROJECT NORTH	2 / A5.2	DETAIL SECTION
	WOOD FINISH		MATCH LINE	5 / A5.2	DETAIL SECTION
	WOOD ROUGH FRAMING		LEVEL LINE	A5.2 2	INTERIOR ELEVATION

ACCESSORIES

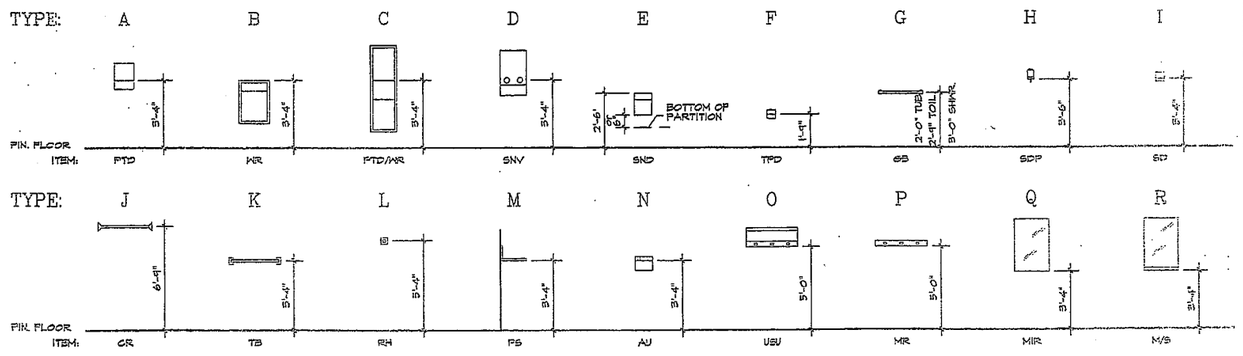

PROJECT DATA

OWNER

GREENEVILL LIGHT & POWER SYSTEM
GREENEVILLE, TENNESSEE

PROJECT

INTERIOR RENOVATIONS FOR
GREENEVILLE LIGHT & POWER BUILDING
GREENEVILLE, TENNESSEE

PROJECT SQUARE FOOTAGE

11,962 Main Floor SQ. FT.
3,204 Lower Level SQ. FT.

OCCUPANCY CLASSIFICATION

BUSINESS

CONSTRUCTION TYPE

TYPE IV UNPROTECTED

CODES AND ORDINANCES

1999 SBCCI STANDARD BUILDING CODE
1999 SBCCI STANDARD GAS CODE
1997 SBCCI STANDARD MECHANICAL CODE
2003 UNIFORM FIRE CODE (NFPA 101)
2002 NORTH CAROLINA ACCESSIBILITY CODE WITH 2004 AMENDMENTS

GRAB BAR REQUIREMENTS @ BATHROOMS

1. 1 1/4" TO 1 1/2" OUTSIDE DIAMETER.
2. 1 1/2" CLEAR HANDSPACE BETWEEN THE INNER FACE OF THE GRAB BAR & THE FINISHED WALL.
3. MUST SUPPORT A 250 POUND LOAD.
4. MUST BE LOCATED NOT LESS THAN 33" OR MORE THAN 36" ABOVE THE FINISHED FLOOR.

GENERAL NOTES

1. Do not scale drawings - use dimensions only. For dimensions not shown or in question, contractor shall request clarification from architect before proceeding.
2. Unless otherwise noted, interior partition dimensions are given face to face at finish surface/CMU or face of stud/CMU to column centerline. Millwork detail dimensions are from face of finish surfaces. (GYB, plaster, etc.)
3. Elevations and levels are shown to top of finished hard surfaces (concrete floor slab), exclusive of applied finishes (carpet, VCT, other thinset finish materials.
4. Contractor shall verify all existing dimensions, conditions, and equipment locations in the field. Discrepancies shall be brought to the attention of the Architect.
5. Electric panels, alarm boxes, fire equipment cabinets and other recessed boxes greater than 16 square inches that are located in rated walls shall be backed by gypsumwall board layers sufficient to maintain the designated rating.
6. All vertical piping exposed in rooms shall be furred and finished to match adjacent wall. Exceptions are mechanical and elevator equipment rooms, electric and telephone closets.
7. Ceiling and access panels shall be provided in non-accessible ceilings below the following mechanical and plumbing devices:
   A. Valves
   B. Flow Measuring Devices
   C. Mixing Boxes
   D. Power Operated Dampers
   E. Access Panels in Ductwork
   F. Volume and Balancing Devices
   G. Water Flow Switches
   H. Sprinkler System Drains and Test Connections
   I. Pressure Switches
8. All existing work, furnishings, equipment or material to remain that are damaged by Contractor's operation under this contract shall be rectified or repaired at no additional cost to owner.

REVISIONS

NO.	DATE	DESCRIPTION

INTERIOR RENOVATIONS FOR
GREENEVILLE LIGHT & POWER BUILDING
GREENEVILLE, TENNESSEE

William T. Gass
ARCHITECT
Greeneville, Tennessee

Copyright © 2006
All Rights Reserved

DRAWN:	LDD
CHECKED:	WTG
JOB NO:	0-12-06
SCALE:	AS NOTED
DATE:	04/03/07
FILE NAME:	
DRAWING TITLE:	DRAWING STANDARDS
DRAWING NO:	DS

To order plans, go to www.idrepro.com