NEW GOODYEAR ELEMENTARY SCHOOL

(VAN WERT ELEMENTARY SCHOOL)

POLK COUNTY GEORGIA

POLK COUNTY BOARD OF EDUCATION

JAMES W. BUCKLEY & ASSOCIATES, INC.
ARCHITECTS
163 NORTH WASHINGTON STREET, SUITE 509
ALBANY, GA 31702-2294
PH (229) 883-4288
FAX (229) 883-0938
EMAIL JWB@WILKCREY.COM

MECHANICAL ENGINEER
PRUETT & FORD, INC.
1201 BROAD STREET, SUITE 3A
AUGUSTA, GEORGIA 30901 - 1115
PH (706) 722-5959
FAX (706) 724-3127
EMAIL PRUETT@PRUETTFORD.COM

ELECTRICAL ENGINEER
ELECTRICAL DESIGN CONSULTANTS, INC.
741 - AIRPORT DRIVE
MACON, GEORGIA 31210
PH (478) 781-1833
FAX (478) 781-1467
EMAIL EDC@PRELLSOUTH.NET

STRUCTURAL ENGINEER
W. HUNTER SAUSSY III, PC
[illegible]

INDEX TO DRAWINGS

CIVIL

- C1.0 - GENERAL NOTES
- C1.1 - EXISTING TOPOGRAPHY & DEMOLITION PLAN
- C1.2 - EROSION & SEDIMENT CONTROL PHASE 1
- C1.3 - LAYOUT PLAN
- C1.4 - GRADING & DRAINAGE PLAN
- C1.5 - EROSION & SEDIMENT CONTROL PHASE 1
- C1.6 - UTILITY PLAN
- C1.7 - EROSION & SEDIMENT CONTROL PHASE 1
- C1.8 - PAVING & DRAINAGE DETAILS
- C1.9 - UTILITY DETAILS
- C2.1 - EROSION & SEDIMENT CONTROL DETAILS

ARCHITECTURAL

- A1.0 - COVER SHEET
- A1.0 - COMPOSITE FLOOR PLAN
- A1.1 - FIRE PROTECTION PLAN
- A1.2 - FLOOR PLAN - ADMIN AND MEDIA CENTER
- A1.3 - FLOOR PLAN - MUSIC ART, COMMONS, CAFETORIUM AND KITCHEN
- A1.4 - FLOOR PLAN - MULTI PURPOSE AND COVERED WALK
- A1.5 - FLOOR PLAN - CLASSROOM WING "D" AND "E"
- A1.6 - FLOOR PLAN - CLASSROOM WING "F"
- A1.7 - REFLECTIVE CEILING PLAN
- A1.8 - ROOM FINISHING SCHEDULE
- A4.1 - DOOR SCHEDULE
- A4.2 - DOOR DETAILS
- A4.3 - WINDOW DETAILS
- A4.4 - WINDOW DETAILS
- A5.0 - COMPOSITE ELEVATIONS
- A5.1 - CLASSROOM ELEVATIONS
- A5.2 - CLASSROOM WING AND COURTYARD
- A5.3 - CONNECTION CORRIDOR ELEVATIONS
- A5.4 - ENTRANCE CANOPY ELEVATIONS & DETAILS
- A6.0 - BUILDING CROSS SECTIONS
- A6.1 - BUILDING CROSS SECTIONS
- A7.0 - WALL SECTIONS
- A7.1 - WALL SECTIONS
- A7.2 - WALL SECTIONS
- A7.3 - WALL SECTIONS
- A7.4 - WALL SECTIONS
- A7.5 - WALL SECTIONS
- A7.6 - WALL SECTIONS
- A7.7 - WALL SECTIONS
- A7.8 - SECTIONS
- A7.9 - CANOPY SECTIONS
- A7.10 - CANOPY SECTIONS & DETAILS
- A8.0 - ROOF PLAN
- A8.1 - ROOF DETAILS
- A8.2 - DETAILS
- A8.3 - NOT USED
- A9.0 - ENLARGE KITCHEN FLOOR PLAN
- A9.1 - ENLARGE MEDIA CENTER
- A9.2 - ENLARGE ADMINISTRATION FLOOR PLAN
- A9.3 - ENLARGE MUSIC ART AND TOILETS FLOOR PLAN
- A9.4 - NOT USED
- A9.5 - ENLARGE FLOOR PLAN - CAFETORIUM AND STAGE
- A10.0 - MILLWORK SECTIONS
- A10.1 - MILLWORK SECTIONS
- A10.2 - MILLWORK DETAILS
- A11.0 - DETAILS
- A11.1 - DETAILS
- A11.2 - DETAILS
- A11.3 - DETAILS
- A11.4 - DETAILS
- A11.5 - DETAILS
- A11.6 - DETAILS
- A11.7 - COLUMN DETAILS

STRUCTURAL

- S0.1 - STRUCTURAL NOTES
- S1.1 - COMPOSITE FOUNDATION PLAN
- S1.2 - FOUNDATION PLAN - AREAS A AND B
- S1.3 - FOUNDATION PLAN - AREA C
- S1.4 - FOUNDATION PLAN - AREAS D AND E
- S1.5 - FOUNDATION PLAN - AREA F
- S2.1 - ROOF FRAMING PLAN - AREA A
- S2.2 - DEMOLISH FOUNDATION AND ROOF FRAMING PLANS
- S3.1 - COLUMN AND FOUNDATION SCHEDULE
- S4.1 - TYPICAL DETAILS
- S4.2 - TYPICAL DETAILS

PLUMBING

- P1.0 - PLUMBING WASTE PLAN - AREA "B"
- P1.1 - PLUMBING WATER PLAN - AREA "B"
- P1.2 - PLUMBING PLAN - AREA "C"
- P1.3 - PLUMBING PLAN - CLASSROOM WING "D"
- P2.1 - PLUMBING WASTE AND VENT PLAN
- P2.2 - PLUMBING WATER PLAN
- P3.1 - PLUMBING DETAILS AND SCHEDULES
- P3.2 - PLUMBING DETAILS

MECHANICAL

- M1.1 - HVAC PLAN - AREA "A"
- M1.2 - HVAC PLAN - AREA "B"
- M1.3 - HVAC PLAN - AREA "C" AND "D"
- M1.4 - HVAC PLAN - AREA "D" AND "E"
- M2.1 - HVAC DETAILS
- M2.2 - HVAC DETAILS
- M3.1 - HVAC SCHEDULES AND POINTS LISTS
- M3.2 - HVAC SCHEDULES AND LEGEND

ELECTRICAL

- E1.0 - LIGHTING FIXTURE SCHEDULE, NOTES AND DETAILS
- E1.2 - ELECTRICAL SITE PLAN
- E2.0 - LIGHTING AND POWER PLAN - ADMINISTRATION
- E2.1 - POWER PLAN - MEDIA CENTER
- E2.2 - LIGHTING PLAN - AREA "B"
- E2.3 - POWER PLAN - AREA "B"
- E2.4 - LIGHTING PLAN - CLASSROOM AREA "D" AND AREA "E"
- E2.5 - POWER PLAN - CLASSROOM AREA "D" AND AREA "E"
- E2.6 - LIGHTING PLAN - CLASSROOM WING "D" & "E"
- E2.7 - POWER PLAN - CLASSROOM WING "D" & "E"
- E2.8 - POWER PLAN - KITCHEN
- E2.9 - FIRE ALARM INTERCOM ALARM SYSTEMS PLAN
- E2.10 - TELEVISION DISTRIBUTION SYSTEM PLAN
- E2.11 - INTERCOM SYSTEM PLAN
- E2.12 - DATA / VOICE NETWORKING
- E3.0 - POWER RISER DIAGRAM
- E3.1 - PANELBOARD SCHEDULE
- E3.2 - PANELBOARD SCHEDULE
- E3.3 - DETAILS

MATERIAL LEGEND

[illegible]

DRAWING SYMBOLS

[illegible]

SCHEDULE OF MOUNTING HEIGHTS

[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]

HANDICAPPED FIXTURE REQUIREMENTS

[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]

TYPICAL ABBREVIATIONS

[illegible]

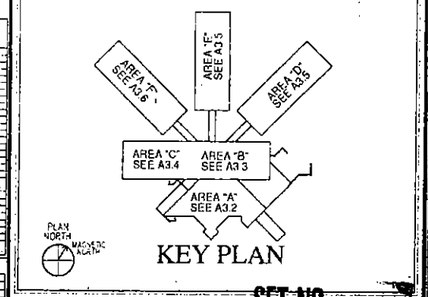

KEY PLAN

SET NO.

GENERAL NOTES

THE FOLLOWING NOTES SUPPLEMENT AND ADD TO THE DRAWINGS AND SPECIFICATIONS OF SHEET 1, NEW CONSTRUCT. AMENDMENTS, ETC., CREATED BY AND NOTED THE CONTRACTOR SHALL COMPLY WITH THE MORE OF MORE STRINGENT REQUIREMENT.

A. DIMENSIONS

1. THE GENERAL CONTRACTOR, SUBCONTRACTORS AND ALL WORKERS ON THE PROJECT ARE NOT ALLOWED TO SCALE DRAWINGS TO DETERMINE DIMENSIONS AND DIMENSIONS. IF FURTHER DIMENSIONS ARE REQUIRED, CONTACT THE SHOP DRAWINGS, THE WRITTEN CLARIFICATION BY ARCHITECT. DIMENSIONS ARE GIVEN TO FACE OF STUD, FACE OF BRICK, FACE OF BLOCK UNLESS NOTED OTHERWISE.

2. THE CONTRACTOR SHALL VERIFY ALL DIMENSIONS, GRADE ELEVATIONS AND OTHER CONDITIONS BY TAKING MEASUREMENTS PRIOR TO ORDERING MATERIALS OR DOING WORK. NOTIFY ARCHITECTS OF ANY DEFECTS OR DISCREPANCIES. THE CONTRACTOR IS RESPONSIBLE FOR MEASUREMENTS. NO COMPENSATION WILL BE GIVEN TO ANY CLAIM BASED ON DISCREPANCY BETWEEN FIELDWORK OF SAID ACTIONS AND ACTUAL MEASUREMENTS.

B. SIMILAR CONDITIONS

1. WHERE A DETAIL OR SECTION IS SHOWN FOR ONE CONDITION, IT APPLIES TO ALL OTHER OF SIMILAR CONDITIONS.

C. COORDINATION

1. COORDINATING BUILDING OF CONTRACTORS WORK WITH OTHER TRADES IS ESSENTIAL AND ANY EXPENSE REQUIRED FOR REMOVAL AND RELOCATION SHALL BE BORNE BY CONTRACTOR.

D. SITE WORK

1. PRIOR TO CLEARING AND GRUBBING PROVIDE SURFACE SITE DEWATERING BY EQUIPMENT SETTING SUBMIT, TO OTHER APPROVED METHOD. REMOVE AND MAINTAIN TEMPORARY MEMBERS UNTIL PERMANENT DRAINAGE SYSTEM FROM DRAINS, SHALLOW DITCH ARE INSTALLED.

2. TIE ALL NEW EXTERIOR AND GRADES INTO EXISTING WITH SMOOTH, FLOW AND EVEN SLOPES TO ENSURE THAT WATER DRAINS AWAY FROM ALL NEW AND EXISTING BUILDINGS.

E. CONCRETE BLOCK

1. ALL CONCRETE BLOCK SHALL BE USED AS ALL EXPOSED SURFACES CONCRETE AT WALLS AND PARTITIONS INSIDE BUILDING INCLUDING ENTRANCE AND SIDEWALK CONDITIONS.

2. WHERE CONCRETE BLOCK IS EXPOSED AT INTERIOR WALLS PROVIDE SMALLER CONCRETE CONCRETE BLOCK JOINTS IN MOLDING AND ALL TRUE EDGES.

3. CONTRACTOR SHALL PREPARE MASONRY WALLS TO MEET ALL REQUIREMENTS OF FINISH DETAILS. MANUFACTURER SHALL ENSURE THAT ALL MATERIAL AND INSTALLATION WARRANTIES REMAIN EFFECTIVE.

4. JOINT REINFORCEMENT MAY BE OMITTED IN DETAILS FOR CLARITY. INSTALL IN MASONRY JOINTS AT DESIGNATED INTERVALS WITHIN COURSES OF MORTAR.

5. IN ROOMS WITH EXPOSED STRUCTURAL CEILING, EXTEND WALLS TO ROOF OR FLOOR DECK ABOVE.

F. FLASHING

1. SHOP-MAP ALL FLASHING JOINTS AT MINIMUM AND SEAL WATERTIGHT.

2. ARCHITECT IS TO OBSERVE ALL FLASHING INSTALLATION PRIOR TO FLASHING BEING COVERED UP BY NEW CONSTRUCTION.

POLK COUNTY ELEMENTARY SCHOOL
POLK COUNTY BOARD OF EDUCATION
POLK COUNTY GEORGIA
JAMES W. BUCKLEY & ASSOC., INC. - ARCHITECTS
MPW: [illegible] NO. 1 DATE: [illegible]
MADRAS NO.: [illegible] RENOVATION: [illegible]
FUNDING: STATE/LOCAL TOTAL: $[illegible]

SQUARE FOOTAGE TABULATION:

GROSS BUILDING SQUARE FOOTAGE			57,664 S.F.
MAIN ENTRANCES	3188 S.F. GROSS x 1/2 =		1594 S.F.
OTHER ENTRANCES	332 S.F. GROSS x 1/2 =		166 S.F.
BUS CANOPY	0 S.F. GROSS x 1/2 =		0S.F.
OTHER CANOPIES	345 S.F. GROSS x 1/2 =		173 S.F.
TOTAL GROSS SQUARE FOOTAGE			59,597 S.F.

SQUARE FOOTAGES SHOWN ARE APPROXIMATE. DO NOT USE SQUARE FOOTAGES FOR BIDDING PURPOSES.

NEW GOODYEAR ELEMENTARY SCHOOL (VAN WERT ELEMENTARY)
POLK COUNTY GEORGIA
JAMES W. BUCKLEY & ASSOCIATES, INC - ARCHITECTS
WAYCROSS - ALBANY - ROME - SAVANNAH

A1.0