OfficeMax®

ABBREVIATION LIST

ABOVE FINISHED FLOOR	AFF	LAMINATED PLASTIC	LAM
ADJUSTABLE	ADJ	LANDLORD	LL
ALUMINUM	ALUM	LEFT-HAND	LH
ANCHOR BOLT	AB	LONG LEG HORIZONTAL	LLH
APPROXIMATELY	APPROX	LONG LEG VERTICAL	LLV
ARCHITECTURAL	AARCH	LONG	LG
AT	@	MANHOLE	MH
BEAM	BM	MANUFACTURER	MFR
BEARING	BRG	MASONRY OPENING	MO
BLOCKING	BLKG	MATERIAL	MATL
BOARD	BD	MAXIMUM	MAX
BOTTOM	BTM or B/	MECHANICAL	MECH
BUILDING	BLDG	METAL	MTL
CATCH BASIN	CB	MINIMUM	MIN
CEILING	CLNG	MISCELLANEOUS	MISC
CENTER TO CENTER	C/C	MOUNTED	MTD
CENTERLINE	CL	NOT APPLICABLE	NA
CLEAN OUT	CO	NOT IN CONTRACT	NIC
COLUMN	COL	NOT TO SCALE	NTS
CONCRETE MASONRY UNIT	CMU	ON CENTER	OC or o.c.
CONCRETE	CONC	OPENING	OPNG
CONSTRUCTION	CONST	OPPOSITE	OPP
CONTINUOUS	CONT	OUTSIDE DIAMETER	OD
CONTROL JOINT	CJ	OVERFLOW ROOF DRAIN	ORD
COURSE	CRS	PAINT	PT
DIAMETER	DIA	PAIR	PR
DIMENSION	DIM	PLATE	PL
DOWN	DN	PLUS OR MINUS	+/-
DOWNSPOUT	DS	PLYWOOD	PLWD
DRAWING	DWG	POINT OF SALE	POS
EACH FACE	EF	PRESERVATIVE TREATED	PPT
EACH WAY	EW	PROPERTY LINE	P/L
EACH	EA	QUARRY TILE	QT
ELECTRIC	ELEC	RADIUS	RAD or R
ELECTRIC WATER COOLER	EWC	RAIN WATER CONDUCTOR	RWC
ELEVATION	ELEV	REINFORCED	REINF
EQUAL	EQ	REQUIRED	REQ'D
EXISTING	EXIST	REVISION	REV
EXPANSION JOINT	EJ	RIGHT HAND	RH
EXTERIOR	EXT	RIGHT OF WAY	ROW
EXTERIOR INSULATION & FINISH SYSTEM	EIFS	ROOF DRAIN	RD
FIBER REINFORCED PLASTIC	FRP	SECTION	SECT
FINISH	FIN	SHEET	SHT
FINISHED FLOOR	FF	SIMILAR	SIM
FIRE EXTINGUISHER CABINET	FEC	SPECIFICATION	SPEC
FIRE RETARDANT TREATED	FRT	SQUARE FEET	SF
FIXTURE	FIXT	STAINLESS STEEL	SS
FLOOR	FLR	STANDARD	STD
FLOOR DRAIN	FD	STEEL	STL
GALVANIZED	GALV	STRUCTURAL	STRUCT
GAUGE	GA	SUSPENDED	SUSP
GENERAL CONTRACTOR	GC	TELEPHONE	TEL
GLASS	GL	TONGUE AND GROOVE	T&G
GLASS FIBER REINFORCED CONCRETE	GFRC	TOP OF	T/
GLASS FIBER REINFORCED GYPSUM	GFRG	TOP OF JOIST	TOJ
GYPSUM BOARD	GYP BD	TOP OF MASONRY	TOM
HANDICAPPED	HCPD	TOP OF STEEL	TOS
HARDWOOD	HDWD	TYPICAL	TYP
HEATING/VENTILATING/AIR CONDITIONING	HVAC	UNLESS NOTED OTHERWISE	UNO
HEAVY DUTY	HD	U/S	UNDERSIDE
HOLLOW CORE	HC	VERTICAL	VERT
HOLLOW METAL	HM	VINYL COMPOSITION TILE	VCT
HORIZONTAL	HORIZ	VINYL TILE	VT
HOSE BIBB	HB	VINYL WALL COVERING	VWC
HOT WATER HEATER	WH	WALL COVERING	WC
HOUR	HR	WELDED WIRE FABRIC	WWF
INSIDE DIAMETER	ID	WITH	W/
INSULATION	INSUL	WITHOUT	W/O
INTERIOR	INT	WOOD	WD
JOIST BEARING	JB	WORK POINT	WP

CODE SUMMARY - BASED ON 2003 IBC

CRITERIA	REQUIREMENTS	IBC 2003
TYPE OF CONSTRUCTION	TYPE: II-B SPRINKLERED	IBC SECTION 602
NUMBER OF FLOORS	1	
USE AND OCCUPANCY GROUP	M- MERCANTILE	IBC SECTION 309
ACCESSORY USE	B-BUSINESS & S1- STORAGE	IBC SECTION 302.2
AREA AND OCCUPANT LOAD CALCULATIONS		
M: 13,952 SQ FT / 30 SQ. FT. PER OCCUPANT=	445 OCCUPANTS	IBC TABLE 1004.1.2
B: 155 SQ FT / 100 SQ. FT. PER OCCUPANT=	2 OCCUPANTS	IBC TABLE 1004.1.2
S1: 1,542 SQ FT / 300 SQ. FT. PER OCCUPANT=	5 OCCUPANTS	IBC TABLE 1004.1.2
TOTAL SQUARE FEET / TOTAL OCCUPANTS	15,049 SF / 452 OCCUPANTS	
EXITS REQUIRED / EXITS PROVIDED	3 / 3	IBC TABLE 1018.1
EGRESS WIDTH REQUIRED 452 OCCUPANTS x .15 INCHES PER OCCUPANT =	67.8" REQUIRED	IBC TABLE 1005.1
EGRESS WIDTH PROVIDED 2 DOORS x 34" EACH = 68" 1 DOOR x 80" = 80"	148" PROVIDED	
PLUMBING CALCULATIONS		
MALE: M - 226 OCCUPANTS		IBC TABLE 2902.1
M: TOILETS - 1 PER 500/LAVS - 1 PER 750	1 TOILET / 1 LAVATORY / 1 URINAL	
FEMALE: FM - 226 OCCUPANTS		IBC TABLE 2902.1
FM: TOILETS - 1 PER 500 / LAVS - 1 PER 750	1 TOILET / 1 LAVATORY	
ACTUAL FIXTURES PROVIDED	3 TOILETS / 2 LAVATORY / 1 URINAL	

CONTACTS

LANDLORD
ABERNATHY & TIMBERLAKE
3700 CRESTWOOD PARKWAY, SUITE 900
DULUTH, GEORGIA 30096
CONTACT: RICHARD SNOPE
PH: 678-584-4990
E: rsnope@abernathytimberlake.com

ARCHITECT
HERSCHMAN ARCHITECTS, INC.
25001 EMERY ROAD #400
CLEVELAND, OH 44128
CONTACT: DAVID CONAN
PH: 216-223-3233
E: dconan@herschmanarchitects.com

TENANT
OFFICEMAX INC.
263 SHUMAN BOULEVARD
NAPERVILLE, ILLINOIS 60563
CONTACT: MICHAEL MUELLER
PH: 630-909-0458
E: michaelmueller@officemax.com

M.E.P. ENGINEERS
McHENRY AND ASSOCIATES
25001 EMERY ROAD #200
CLEVELAND, OH 44128
CONTACT: DENNIS DALY
PH: 216-292-4646
E: mail@mchenryandassociates.com

VICINITY / SITE MAP

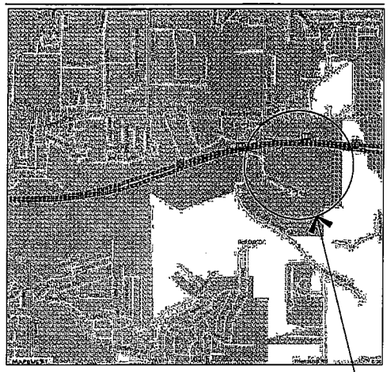

KEY PLAN

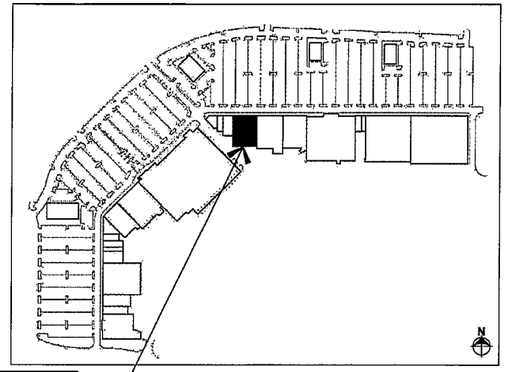

OfficeMax
15,049 S.F.
190 OXFORD EXCHANGE BLVD.
OXFORD, ALABAMA

SCOPE OF WORK

THE PROJECT CONSISTS OF AN INTERIOR BUILD-OUT OF THE RETAIL STORE FOR OFFICEMAX, INC. STORE LOCATION IS AT 190 OXFORD EXCHANGE BLVD. IN OXFORD, ALABAMA.

THE WORK OF THIS PHASE INCLUDES CONSTRUCTION OF AN APPROXIMATELY 15,049 SQ. FT. INTERIOR BUILD-OUT. THE EXTERIOR SHELL IS BEING DESIGNED UNDER A DIFFERENT SUBMISSION.

DEVELOP RESPONSIBILITY SCHEDULE

		GENERAL CONTRACTOR		OFFICE-MAX		
		VENDOR INSTALL	SUPPLY	INSTALL	SUPPLY	INSTALL	
PERMITS			•				ARCHITECT TO PREPARE PERMIT APPS.
02870	BOLLARDS AT STOREFRONT & IMPACT DRS.			•	•		VENDOR #4
	BOLLARDS AT LOADING DOCK		•	•			
03000	FLOOR LEVELING		•	•			
03300	CONCRETE		•	•			
05515	ROOF LADDER & SCUTTLE		•	•			
06200	ROUGH & FINISH CARPENTRY		•	•			
06400	MILLWORK			•	•		VENDOR #7
	COUNTERS AND SHELVING			•	•		VENDOR #7
07530	MEMBRANE ROOFING SYSTEM		•	•			COORDINATE WITH LANDLORD ROOF CONTR.
07920	SEALANTS		•	•			
08210	DOORS, FRAMES AND TRIM		•	•			
08330	OVERHEAD ROLLING GRILLES	•			•	•	VENDOR #14
08330	OVERHEAD DOCK DOOR	•			•	•	VENDOR #14
08400	IMPACT DOORS			•	•		VENDOR #11
08710	DOOR FINISH HARDWARE			•	•		VENDOR #20
08720	AUTOMATIC SLIDING DOORS	•		•	•		VENDOR #6
09110	LIGHT GAUGE METAL FRAMING		•	•			
09250	GYPSUM WALL BOARD		•	•			
09510	ACOUSTICAL CEILING SYSTEM		•	•			
09650	RESILIENT FLOORING AND BASE		•	•			VENDOR #30
09680	CARPETING / TRANSITION STRIPS	•			•	•	VENDOR #21
09900	PAINTING			•			VENDOR #26
10155	TOILET COMPARTMENTS			•	•		VENDOR #2
10260	STAINLESS STEEL ACCESSORIES			•	•		VENDOR #4
10440	EXTERIOR SIGNAGE				•	•	VENDOR #12
	INTERIOR SIGNAGE				•	•	
10500	LOCKERS			•	•		VENDOR #28
10520	FIRE EXTINGUISHERS		•	•			PER LOCAL FIRE AUTHORITIES, VENDOR #31
10550	VENDING MACHINES				•	•	
10670	MULTIFUNCTIONAL DISPLAY RACKS				•	O	VENDOR #1
10800	TOILET ACCESSORIES				•	•	VENDOR #20
10915	CLOSET ROD AND SHELF			•	•		VENDOR #7
11112	BALER				•	•	VENDOR #24
12484	RUGS AND MATS		•	•			
15000	HVAC SYSTEM/ROOF TOP UNIT/ACCESSORIES			•	•		VENDOR #15
	DUCTWORK / AIR DEVICES		•	•			
15400	PLUMBING SYSTEM		•	•			
15455	ELECTRIC WATER COOLER		•	•			
15500	SPRINKLER SYSTEM		•	•			
16000	ELECTRIC SYSTEM		•	•			
	PRE-FAB ELECTRICAL DISTRIBUTION CENTER			•	•		VENDOR #27
	LIGHTING FIXTURES			•	•		VENDOR #5
	BUILDING SECURITY SYSTEM	•			•	•	VENDOR #22
	ENERGY MANAGEMENT SYSTEM	•			•	•	
	TELEPHONE CABLING & EQUIPMENT	•			•	•	
	POWER CONDITIONING				•	•	VENDOR #18
	NETWORK CABLING	•			•	•	VENDOR #19
16100	PLUGMOLD			•	•		VENDOR #5

DRAWING INDEX

AA	COVER SHEET						
ARCHITECTURAL							
A0.1	LIFE SAFETY PLAN						
A0.2	ADA PLANS, ELEVATIONS & DETAILS						
A1.0	FLOOR PLAN						
A1.1	FLOOR & WALL FINISH PLAN						
A2.0	CEILING PLAN						
A3.0	PARTIAL PLANS AND SECTIONS						
A4.0	INTERIOR ELEVATIONS & DETAILS						
A4.1	INTERIOR ELEVATIONS						
A5.0	ROOM AND DOOR SCHEDULES / SPECIFICATIONS						
A6.0	WALL SECTIONS						
A6.1	WALL SECTIONS & DETAILS						
F1	FIXTURE PLAN						
MECHANICAL							
M1	PLUMBING FLOOR PLAN						
M2	MECHANICAL AND PLUMBING DIAGRAMS						
M3	MECHANICAL FLOOR PLAN						
M4	MECHANICAL DETAILS AND NOTES						
M5	MECHANICAL SPECIFICATIONS						
ELECTRICAL							
E1	LIGHTING PLAN						
E2	POWER FLOOR PLAN						
E3	ELECTRICAL NOTES AND SCHEDULES						
E4	ELECTRICAL DIAGRAMS						
E5	ELECTRICAL DISTRIBUTION CENTER DIAGRAMS						
E6	FIRE ALARM SYSTEM PLAN						
E7	ELECTRICAL SPECIFICATIONS						

DEFFERRED SUBMITTALS:

OFFICEMAX VENDOR LIST

* VENDOR LIST LAST UPDATED - 03.14.07
**REFER TO SPECIFICATION SECTION 00420 FOR VENDOR PROGRAM & REQUIREMENTS

NO.	VENDOR	RESPONSIBILITY	NO.	VENDOR	RESPONSIBILITY	NO.	VENDOR	RESPONSIBILITY
1	JIM BOGUSZ MADIX STORE FIXTURES 36750 SANTA BARBARA CLINTON TOWNSHIP, MI 48036 (586) 469-5213	METAL DISPLAY FIXTURES	14	BILL ACKERMAN CORNELL STOREFRONT SYSTEMS P.O. BOX 1549 PLAINS, PA 18705 (800) 882-6778	ROLLING GRILLES & OVERHEAD DOORS	29	NOT USED	
2	MATTHEW L. GLENN GLENCO, INC. 4600 MABRY DRIVE CLOVIS, NM 88102 (505) 763-4414	STRUCT. STEEL AND STEEL JOIST SYSTEM (OPTIONAL)	15	ROZI DOLE LENNOX INDUSTRIES 2100 LAKE PARK BLVD. RICHARDSON, TX 75080 (800) 367-6285	HVAC EQUIPMENT	30	LISA CAVATAIO ARMSTRONG WORLD INDUST. 1204 GRENHAM PLACE ROCKFORD, IL 61107 (815) 484-4377	VINYL TILE FLOORING, VINYL COVE BASE, ACOUSTIC CEILING TILE
3	NOVAR CONTROLS CORP. 6060 ROCKSIDE WOODS BLVD SUITE 400 CLEVELAND, OHIO 44131 BOB LANGAN (216) 682-1324	ENERGY MANAGEMENT SYSTEM	16	HEATHER GLASNOVICH CROSSCOM NATIONAL, LLC 1001 ASBURY DRIVE BUFFALO GROVE, IL 60089 (800) 433-4203 x213	TELEPHONE SYSTEM	31	GLENN MATHEWS FIRE MATERIALS GROUP LLC 127 SOUTH WEBER DRIVE CHANDLER, AZ 85226 (480) 753-5444	FIRE EXTINGUISHERS
4	BARBIE HAGGADONE CUSTOM ARCHITECTURAL DESIGN 4021 FAMBROUGH DRIVE POWDER SPRINGS, GA 30127 (800) 683-3805	BOLLARDS, CORNER GUARDS	17	TIM KELLY FACTORY MUTUAL INSURANCE CO. 300 SOUTH NORTHWEST HIGHWAY PARK RIDGE, IL 60068 (847) 450-7141	INSURANCE UNDERWRITER (SPRINKLER SYSTEM)	32	NOT USED	
4 ALT.	TONYA McNABB COMPLETE DISPLAY SYSTEMS, INC. 707 WHITLOCK AVE. SW SUITE E20 MARIETTA, GA 30064 (770) 419-1765	BOLLARDS, CORNER GUARDS	18	DEAN DILLILO FOX CORPORATION 33 PONY FARM ROAD CLAYTON, NC 27520 (919) 354-3424	EDG & EDG ACCESS LADDER	33	STEVE CRONE JOHNS MANVILLE 2516 GLEN ECHO HUDSON, OH 44236 (330) 653-8404	ROOFING & INSULATION
5	DOUG HAMRICK LOEBB ELECTRIC 415 WILLIAMS AVENUE COLUMBUS, OH 43212 (888) 563-2664	LIGHT FIXTURES & WIRING * (B WK. LEAD TIME) POWER POLE RACEWAYS; PLUGMOLD	19	JENNIFER SCUNCIO COMPUCOM 10000 INTERNATIONAL BLVD. CINCINNATI, OH 45246 (713) 446-1642	DATA CABLING	34	DENISE CURRAN McGUE CORPORATION 33 CONGRESS STREET SALEM, MA 01970 (800) 800-8503	FLOOR MOUNTED BUMPER SYSTEM
6	CAMERON CARY STANLEY ACCESS TECH. 65 SCOTT SWAMP ROAD FARMINGTON, CT 06032 (561) 749-6616	AUTOMATIC DOORS	20	KAREN KING BASS SECURITY SERVICES, INC. 26701 RICHMOND ROAD CLEVELAND, OH 44146 (216) 735-1200	DOOR HARDWARE, RESTROOM ACCESSORIES, TOILET COMPARTMENTS	35	MIKE THOMPSON TO MARKET 2977 MEADOWLAND DR. UNIONTOWN, OH. 44685 (614) 551-7428	RUBBER TILE
7	DOUG REIMAN CREATIVE CABINETS 1 POP RITE DRIVE ARCANUM, OH 45304 (937)-692-5188	MILLWORK	21	JEFF BUTTERFIELD MILLIKEN CARPET CONSUMER ENVIR. 2464 N. LIMESTONE ST. SPRINGFIELD, OH 45503 (937) 657-2755	CARPET			
7 ALT.	CAROL WASSERMAN GENESIS FIXTURES 3842 REDMAN DRIVE FT. COLLINS, COLORADO (970) 484-2241	MILLWORK	22	DAN GOLDSMITH NAT. GUARDIAN SECURITY SERVICES 155 E. WILDMERE AVENUE, SUITE 102J LONGWOOD, FL 32750 (740) 862-0701	SECURITY ALARM & FIRE ALARM			
8	GARY STRUC ALVARADO MANUFACTURING CO. 12660 COLONY ST. CHINO, CA. 91710 (800) 423-4143	CHROME CART RAILS	23	LES STRUC MIDWEST FACTORY 804 EAST MONUMENT AVENUE DAYTON, OHIO 45402 (800) 777-3211	EMPLOYEE LOCKERS			
9	NOT USED		24	PETE HURD HJA INTERNATIONAL 88 BEACON STREET BUFFALO, NY 14220 (800) 836-2258	BALER			
10	SAM STEIN THE MATWORKS 11400 OLD BALTIMORE PIKE BELTSVILLE, MD 20705 (301) 837-1256 EXT. 257	VESTIBULE FLOOR SYSTEM & WALK OFF MAT	25	CHUCK BITER SIRTMAN & ASSOCIATES, INC. 7115 COCKRILL BEND BLVD. NASHVILLE, TN 37204 (615) 350-6000	DOORS AND FRAMES			
11	RAY STRUMBLY COMMERCIAL DOCK & DOOR 7653 ST.CLAIR AVE. MENTOR, OHIO 44060-5235 (440) 951-4541	LOADING DOCK EQUIPMENT & WAREHOUSE IMPACT DOORS	26	PETER COBB SHERWIN WILLIAMS NAT'L ACCT. 11410 ALAMEDA DRIVE STRONGSVILLE, OH 44149 (440) 846-4305	PAINT MANUFACTURER			
12	DICK COPELAND NORTH AMERICAN SIGN 3601 WEST LATHROP SOUTH BEND, IN 46628 (317) 234-5252	EXTERIOR SIGNAGE (BY OFFICEMAX), OFFICEMAX CONSTRUCTION BANNER	27	SAME AS VENDOR #18	PDO, EDG, PANELS, FUSES, DISCONNECTS, LIGHTING CONTRACTORS/PANEL, GENERATOR			
13	JERRY GALBREATH DIGITAL RELIANCE 386 CHARMEL PLACE COLUMBUS, OH 43235	ELECTRONIC CLOSEOUT DOCUMENTS	28	NOT USED				

To order plans, go to www.ldirepro.com

J:\projects\Ones\Advantage 1\ADVANTAGE NEXT 08\DWGS\Advantage NEXT 08 001 AA.dwg
DWG BY: Brooks

Design and construction documents as instruments of service are given in confidence and remain the property of Herschman Architects. The use of this design and these construction documents for purposes other than the specific project named herein is strictly prohibited without expressed written consent of Herschman Architects, Incorporated.

Date	Issue
03.28.07	BID/PERMIT

Drawn By: DLC
Project No.: 10862

OfficeMax® ADVANTAGE NEXT
OXFORD EXCHANGE-190 OXFORD EXCHANGE BLVD.
OXFORD, ALABAMA 36203-CALHOUN COUNTY
STORE #1434

HERSCHMAN ARCHITECTS
INCORPORATED
25001 EMERY ROAD, SUITE 400
CLEVELAND, OH 44128
TEL (216) 223-3200
FAX (216) 223-3210
www.herschmanarchitects.com

AA